





**Double flange reducer**



DN	e1	dn	e2	L	Weight ( kg )		
					PN10	PN16	PN25
100	7.2	80	7.0	200	9.3	9.3	9.8
150	7.8	80	7.0	300	16.4	16.4	16.0
		100	7.2	280	16.0	16.0	17.5
200	8.4	80	7.0	600	25.1	25.1	26.9
		100	1.1	600	26.7	26.7	29.1
		150	7.8	300	22.0	21.5	25.0
250	9.0	100	7.2	600	33.0	32.6	36.8
		150	7.8	600	38.1	37.7	42.3
		200	8.4	300	30.0	29.5	35.5
300	9.6	80	7.0	700	42.0	41.7	46.9
		100	7.2	700	44.0	43.6	49.4
		150	7.8	650	47.4	47.1	53.2
		200	8.4	600	50.7	50.5	57.5
		250	9.0	300	40.5	39.5	49.0
350	10.2	80	7.0	750	50.3	53.1	61.0
		100	7.2	750	52.5	55.2	63.7
		150	7.8	700	56.0	58.8	67.7
		200	8.4	650	59.4	62.3	72.0
		250	9.0	600	63.4	65.8	77.4
		300	9.6	300	49.5	52.0	66.0
400	10.8	80	7.0	800	60.6	67.1	61.9
		100	1.1	800	62.9	69.4	79.1
		150	7.8	750	66.6	73.1	83.2
		200	8.1	700	69.5	76.0	87.0
		250	9.0	650	74.2	80.4	93.2
		300	9.6	600	78.1	84.3	98.7
		350	10.2	300	58.0	67.0	86.0
450	11.4	80	7.0	900	74.1	83.4	93.8
		100	7.2	900	76.7	86.0	96.9
		150	7.8	800	77.4	86.7	98.0
		200	8.4	750	81.0	90.4	102.6
		250	9.0	700	85.2	94.2	108.2
450	11.4	300	9.6	650	89.3	98.3	113.9
		350	10.2	600	91.1	103.2	121.5
		400	10.8	300	72.4	86.6	113.0
500	12	80	7.0	950	88.8	103.2	113.6
		100	7.2	950	91.6	105.9	116.9
		150	7.8	900	95.8	110.2	121.6
		200	8.4	800	95.7	110.1	122.3
		250	9.0	750	100.0	114.1	128.1
		300	9.6	700	104.2	118.3	133.9
		350	10.2	650	106.1	123.3	141.6
		400	10.8	600	110.0	130.0	153.0
		450	11.4	300	76.9	100.6	121.4

## 21、双盘渐缩管


Double flange reducer



DN	e1	dn	e2	L	Weight (kg)		
					PN10	PN16	PN25
600	13.2	80	7.0	1050	122.4	147.4	159.8
		100	7.2	1050	125.6	150.6	163.5
		150	7.8	1000	130.1	155.1	168.5
		250	9.0	900	139.5	164.1	180.2
		300	9.6	800	138.3	163.0	180.6
		350	10.2	750	140.4	168.2	188.5
		400	10.8	700	142.9	174.4	196.0
		450	11.4	650	143.8	178.1	200.9
		500	12.0	600	149.0	190.0	216.0
700	14.4	200	8.4	1100	181.1	195.3	229.6
		25Q	9.0	1050	186.8	200.6	236.7
		300	9.6	1000	192.4	206.2	243.9
		350	10.2	900	188.3	205.2	245.6
		400	10.8	800	183.5	204.1	229.6
		450	11.4	750	184.7	208.1	251.0
		500	12.0	700	187.7	216.2	259.1
		600	13.2	600	195.0	236.0	238.0
800	15.6	400	10.8	1030	260.8	285.0	340.2
		450	11.4	900	247.8	274.8	331.2
		500	12.0	800	241.2	273.3	329.7
		600	13.2	700	245.7	288.4	346.8
		700	14.4	600	250.0	285.0	374.0
900	16.8	400	10.8	1100	311.5	339.6	404.8
		450	11.4	1050	314.1	345.0	411.4
		500	12.0	1000	318.8	354.6	421.2
		600	13.2	800	300.2	346.8	415.2
		700	14.4	700	301.9	337.6	426.1
		800	15.6	600	308.0	352.0	468.0
1000	18	600	13.2	1000	398.6	461.3	546.3
		700	14.4	800	371.6	423.4	528.5
		800	15.6	700	376.2	431.6	550.2
		900	16.8	600	373.0	438.0	585.0
1100	19.2	600	13.2	1100	479.1	542.5	638.9
		700	14.4	1000	483.9	536.4	652.9
		800	15.6	800	454.4	510.5	640.5
		900	16.8	700	448.1	508.1	648.1
		1000	18.0	600	444.4	520.5	677.1
1200	20.4	600	13.2	1150	555.2	638.5	741.6
		700	14.4	1100	578.0	650.4	773.6
		800	15.6	1000	587.2	663.2	799.9
		900	16.8	800	539.9	619.8	766.5
		1000	16.0	700	536.7	632.7	796.0
		1100	19.2	600	527.6	624.3	799.0

21、双盘渐缩管

Double flange reducer

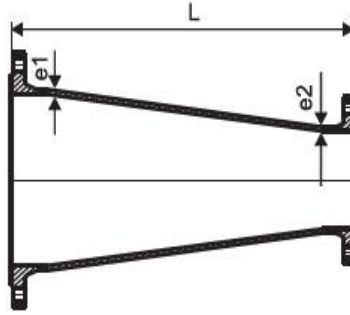

DN	e1	dn	e2	L	Weight (kg)		
					PN10	PN16	PN25
1400	22.8	700	14.4	850	554.7	629.6	801.8
		800	15.6	950	665.7	744.2	929.9
		900	16.8	1100	786.5	868.9	1065
		1000	18.0	1000	788.0	886.5	1099
		1100	19.2	800	723.6	822.8	1047
		1200	20.4	850	814.0	947.0	1064
1500	24	1400	22.8	600	786.0	922.8	1213
1600	25.2	1000	18.0	1650	1354	1404	1717
		1100	19.2	1465	1310	1441	1689
		1200	20.4	1000	1055	1205	1456
		1400	22.8	910	1103	1273	1551
1800	27.6	1000	18.0	1760	1620	1770	2060
		1200	20.4	1710	1747	1899	2199
		1400	22.8	1340	1588	1760	2067
		1500	24.0	1550	1886	2060	2416
		1600	25.2	970	1436	1664	2135
2000	30.0	1000	18.0	2160	2177	2351	2746
		1200	20.4	2140	2369	2545	2951
		1400	22.8	1770	2218	2414	2826
		1500	24.0	1585	2137	2335	2796
		1600	25.2	1400	2070	2299	2324
		1800	27.6	1033	1800	2079	2715
2200	32.4	1000	18.0	2160	2475	2670	/
		1200	20.4	2140	2673	2869	/
		1400	22.8	1770	2488	2703	/
		1600	25.2	1130	2301	2551	/
		1600	27.6	1130	2124	2394	/
		2000	30.0	1090	2250	2570	/
2400	34.8	1000	18.0	2160	2760	3005	/
		1200	20.4	2140	2964	3209	/
		1400	22.8	1770	2741	3006	/
		1600	25.2	1400	2514	2813	/
		1800	27.6	1360	2651	2971	/
		2000	30.0	1260	2703	3047	/
		2200	32.4	1150	2765	3134	/
2600	32.7	1000	18.0	2160	3082	3337	/
		1200	20.4	2140	3291	3547	/
		1400	22.8	1770	3023	3303	/
		1600	25.2	1550	2905	3294	/
		1800	27.6	1460	3058	3388	/
		2000	30.0	1360	3114	3468	/
		2200	32.4	1263	3175	3550	/
		2400	34.8	1210	3311	3746	/